

COPPER CORRUGATED CONNECTORS

SPECIFICATION

Furnish and install Corrugated Copper Water Heater Connectors as manufactured by LSP.

DESIGN FEATURES

- Brass Fittings
- High Quality EPDM gasket
- Non-toxic and sanitary
- Annealed copper for more flexibility
- Tube resists work hardening allowing for more flexibility and easier installation
- External dielectric sleeve eliminates need for dielectric union
- Defect-free tubing is 100% leak tested

MATERIAL SPECIFICATION


- Copper Tubing: UNS C12200 (ASTM B68-86)
- Nuts & End Fittings – C36000 (CDA360) Brass
- Washer: NSF/ANSI 61 compliant

OPERATING SPECIFICATION

- Working Temperature 40°F-160°F with inter-mittent temps up to 180°F
- Working Pressure 20-125 PSI with intermit-tent impulse up to 180 PSI

COMPLIANCES/LISTINGS

LISTING	STANDARD/COMPLIANCE
IAPMO 2111	ASME A112.18.6-2017/CSA B125.6-17
IAPMO 6545	NSF / ANSI 372 - 2016

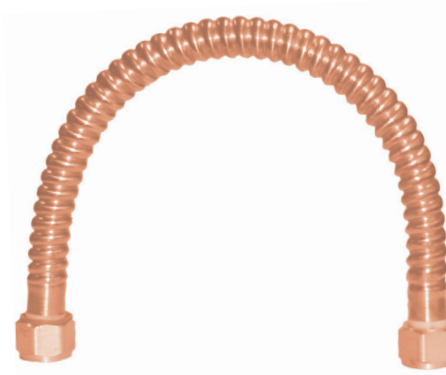

PART NUMBER	DESCRIPTION	LENGTH	MSTR CTN QTY
WCP-112-PP		12"	25
WCP-118-PP	3/4" F.I.P. x 3/4" F.I.P.	18"	25
WCP-124-PP		24"	25
WCP-212-PP		12"	25
WCP-218-PP	3/4" F.I.P. x 3/4" Sweat	18"	25
WCP-224-PP		24"	25
WCP-312-PP		12"	25
WCP-318-PP	3/4" F.I.P. x 3/4" PEX	18"	25
WCP-918-PP		18"	25
WCP-924-PP	3/4" F.I.P. x 3/4" PEX	24"	25

INSTRUCTIONS

1. For use with water in accessible locations only.
2. Install inlet according to manufacturer's instructions. For outlet nut, hand tighten nut plus 1/4" turn with wrench.
3. Turn water on and check for leaks. **DO NOT OVER TIGHTEN** or expose to harsh chemicals.
4. Inspect every six months. Do not Re-use.

Product Submittal	
Job Name:	Date:
Part Number:	Quantity:
Architect:	
Contractor:	

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained. 10/2021