

FRANK PATTERN™ CAST IRON CLEANOUTS

SPECIFICATION

For use with underground drain pipe allowing for emergency access to remove blockages. Recommended for finished floors in non-membrane floor areas.

DESIGN FEATURES



- Corrosion resistant coated cast iron main body with brass cover plate
- Stainless steel fasteners
- Adjustable Round or Square nickel bronze top with gasket
- Secondary closure plug to prevent sewer gases from escaping
- Comes with trap seal primer tapped hole and plug
- Rated for medium duty

COMPLIANCES/LISTINGS

- IAPMO 4191; ASME A112.36.2M - 1991/UPC/IPC
- Compliant to Uniform Plumbing Code (UPC®)
- Compliant to International Plumbing Code (IPC®)

INSTALLATION

1. Position assembly in place with drain pipe connected prior to pouring concrete
2. Connect No hub connection with connection clamp
3. Position cleanout to desired height
4. Pour concrete flooring to top of cleanout

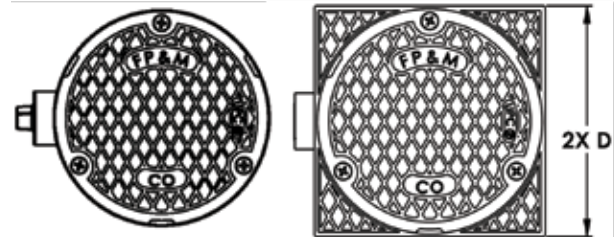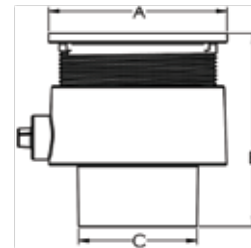

PART NUMBER	DESCRIPTION	MSTR CTN QTY	DIMENSIONS (inches)				
			A	B (min)	B (max)	C	D
N503W4050R	3" No Hub 5" Round Top	4	5 1/16	4 1/2	5 1/2	3 3/8	N/A
N503W4050S	3" No Hub 5" Square Top	4	N/A	4 1/2	5 1/2	3 3/8	5 1/8
N504W4050R	4" No Hub 5" Round Top	4	5 1/16	4 1/2	5 1/2	4 3/8	N/A
N504W4050S	4" No Hub 5" Square Top	4	N/A	4 1/2	5 1/2	4 3/8	5 1/8

Product Submittal	
Job Name:	Date:
Part Number:	Quantity:
Architect:	
Contractor:	

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained. 4/2021