


HANDI CAP WRAP


- Pressure Sensitive Adhesive Backing
- Installs Fast & Easy
- Very Economical
- Multi Use
- White Color for Pleasing Appearance

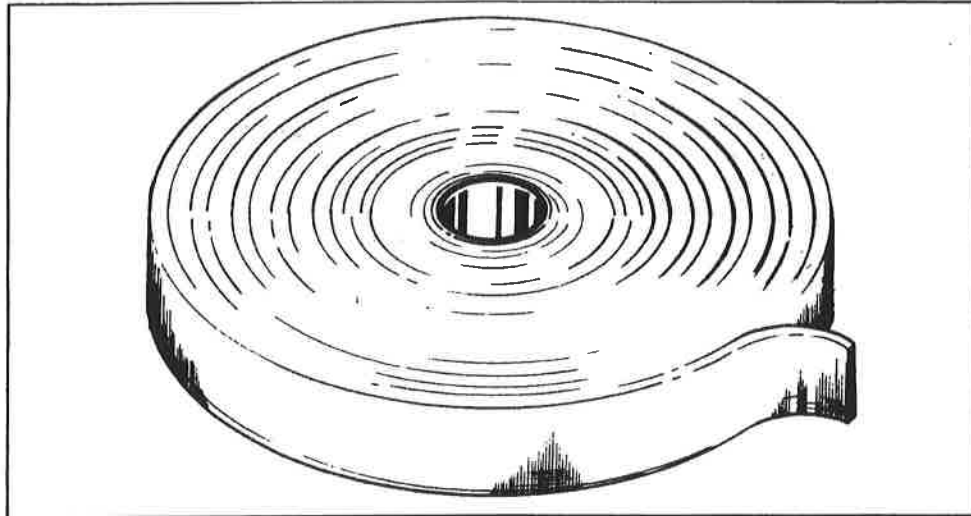

Model No.
HCW-24

Size
1/8" x 2" x 40'

Ctn. Qty.
24 Rolls

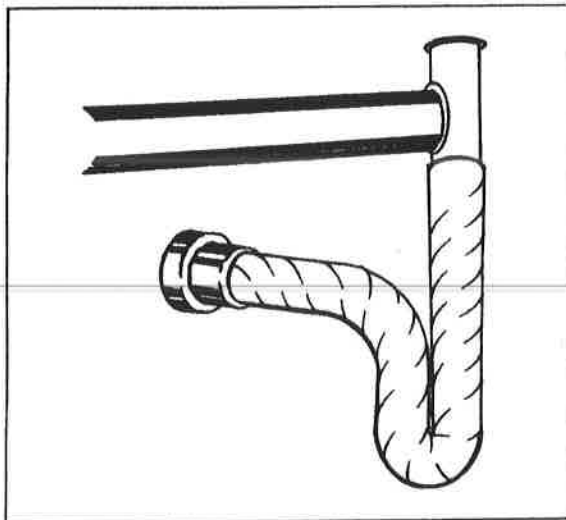

Properties

1. Density
2. Cell size
3. Flexibility: Room Temp.
-65°F
4. Compression set
5. Compression strength
10% deflection
25% deflection
50% deflection
6. Tensile strength
7. Tear strength
8. Co-efficient of thermal
conductivity(k)
9. Thermal stability
10. Maximum temp. service
11. Water absorption
12. Water Vapor Transmission
13. Contact Corrosivity
14. Dusting
15. Abrasiveness
16. Flammability

Units

- pcf
mm
%
psi
psi
lb/in
BTU/hr.FA²/°F.in
% change Avg.
°F
lb/ft²
AEB.in./ATB.sec

Value

- 1.7
0.8
Pass
Pass
8.1
1.5
5.3
16.6
51
20
0.28-0.32
-4.3
160-180°
0.01
0.1-0.2
None
0.003
Pass
3.0/55

Test Method

- MII PPP-C-1752A
ASTM D3576-77
MII PPP-C-1752A
MII PPP-C-1752A
MII PPP-C-1752A
ASTM D1621
ASTM D412
ASTM D1564
Guarded Hot Plate
MII PPP-C-1752A
—
MII PPP-C-1752A
ASTM C-355
MII PPP-C-1752A
MII PPP-C-1752A
MII PPP-C-1752A
ASTM D-16929



P.O. Box 558 • 15324 Illinois Avenue • Paramount, CA 90723 • (310) 531-6224
P.O. Box 1139 • 3215 S. Sweetwater Road • Lithia Springs, GA 30057 • (404) 941-1433