

METAL UNIVERSAL WASHING MACHINE OUTLET BOX



SPECIFICATIONS

Furnish and install Metal Washing Machine Outlet Box with Brass valves.

DESIGN FEATURES

- Available in reversible left or right outlet (drain) and center outlet model
- Easy to install
- Packaged with faceplate
- Deep faceplate for 1" thick drywall
- Constructed of white powder-coated 20 gauge steel
- All come unassembled

VALVE OPERATING SPECIFICATIONS

- Temperature: 40-180°F working temperature
- Pressure: 125 PSI max working pressure

INSTALLATION INSTRUCTIONS

- Install inlet and outlet piping according to the piping manufacturer's instructions

COMPLIANCES/LISTINGS


- IAPMO listed to ASME A112.18.1/CSA B125.1, File 4577
- IAPMO listed to PS 54, File 0901



Part Number	Description	MSTR CTN QTY
Without Valves		
OB-500	White, Reversible Outlet	5
With Copper Sweat Valves		
OB-501	White, Left or Right Outlet	5
OB-502	White, Center Outlet	5
OB-505	White, Left or Right Outlet (Simplex handle included)	5
With Crimp PEX Valves		
OB-506	White, Center Outlet	5
With UPONOR ProPEX® Valves		
OB-525	White, Center Outlet	5
With CPVC Valves		
OB-550	White, Center Outlet	5
OB-551	White, Left or Right Outlet	5

Add "-T" to the end of the part number for Tract Pack (faceplates packaged separately)

DIMENSIONS

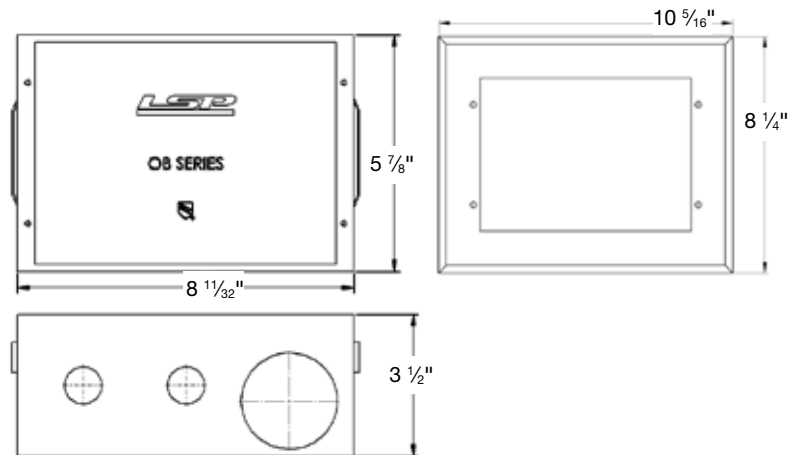

Product Submittal	
Job Name:	Date:
Part Number:	Quantity:
Architect:	
Contractor:	

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained. Rev 2 3/2021