

WASHING MACHINE PULL STOP BOXTM

SPECIFICATION

Furnish and install the Washing Machine Pull Stop BoxTM outlet box as manufactured by LSP.

DESIGN FEATURES

- Patented design moves the angle-stop for washing machine water supply into the wall
- Allows angle stops to be installed during the rough-in phase and be pressure tested for reduced liability and labor
- Easy to install vertically, upside down and, horizontally
- Eliminates the need for a copper stub out
- Unique push-pull handle opens and closes the valve
- Integrated, replaceable valve has a reliable triple O-ring design inlet seal
- 5-year, limited warranty
- Available deep faceplate accepts up to two sheets of 5/8" drywall
- Ball valve design with Teflon seats
- 3/4" GHT outlet connection

CAUTION


- Keep away from solvents/cements/primers
- Keep out of the sun

OPERATING SPECIFICATIONS


- Working Temperature 40°F-180°F
- Working Pressure 125 PSI max

COMPLIANCES/LISTINGS

LISTING			STANDARD/COMPLIANCE
1	IAPMO	2111	ASME A112.18.6-2017/CSA B125.6-17
2	IAPMO	6545	NSF / ANSI 372 - 2016
3	IAPMO	N-6614	NSF / ANSI / CAN 61 - 2018

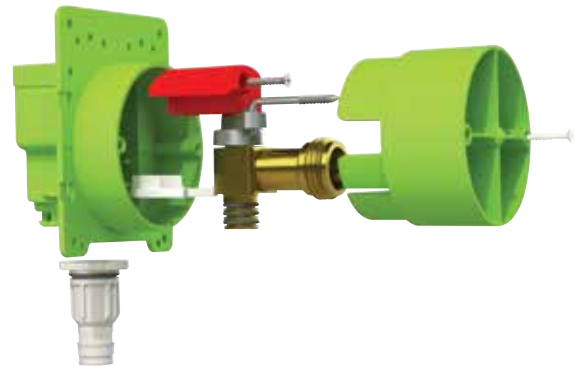

DIMENSIONS

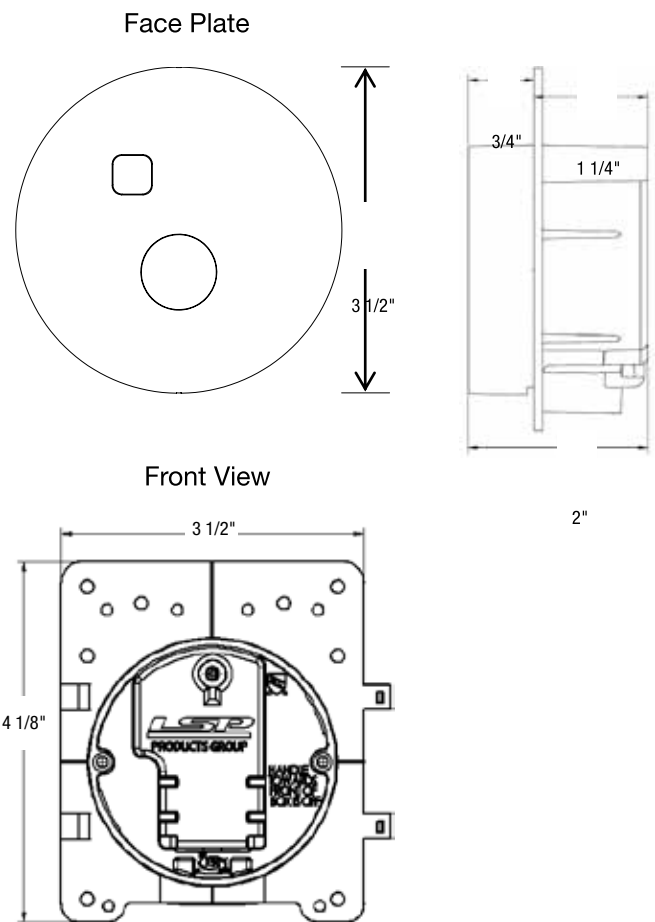



Legacy of **INNOVATION**

AQUAFLO®

WASHING MACHINE PULL STOP BOX™

PART NUMBER	DESCRIPTION	MSTR CTN QTY
ROUGH-IN KITS-INCLUDES BOX, VALVE AND PROTECTIVE COVER		
OBPS-121-RK	1/2" Male Copper Sweat	10
OBPS-122-RK	1/2" Male CPVC	10
OBPS-123-RK	1/2" Crimp PEX	10
OBPS-124-RK	1/2" UPONOR PEX	10
ROUGH-IN KITS WITH HAMMER ARRESTER - INCLUDES TWO BOXES, VALVES, PROTECTIVE COVERS, DRAIN BOX		
OBPS-121-RK-KIT	1/2" Male Copper Sweat	5
OBPS-122-RK-KIT	1/2" Male CPVC	5
OBPS-122-RK-KIT-HA	1/2" Male CPVC w/ Hammer Arrestor	1
OBPS-123-RK-KIT	1/2" Crimp PEX	5
OBPS-123-RK-KIT-HA	1/2" Crimp PEX w/ Hammer Arrestor	1
OBPS-124-RK-KIT	1/2" UPONOR PEX	5
OBPS-124-RK-KIT-HA	1/2" UPONOR PEX w/ Hammer Arrestor	1

MATERIAL SPECIFICATIONS

PART	MATERIAL
Valve Body, Stem	Brass
Valve Handle	Cast Aluminum
Ball	Chrome Plated Brass
O-Rings	High Temperature Rubber
Box	High Impact ABS
PEX Inlet Connection	Engineered Polymer PPSU
CPVC Inlet Connection	Fitting Grade CPVC
Copper Inlet Connection	ASTM B88 Copper Tube

PULL STOP BOX™ ACCESSORIES/REPLACEMENT PARTS

PART NUMBER	DESCRIPTION	MSTR CTN QTY
OBPS-500D-W	Extension Kit For Trim (Deep, White)	10
P-06878-LL	3/8" Compression, 1/4 Turn Replacement Valve, Lead Free	48
P-06879-LL	1/4" Compression, 1/4 Turn Replacement Valve, Lead Free	10
P-06881	3/4" GHT, 1/4 Turn Replacement Valve, Lead Free	120
P-06923	Escutcheon Extension Ring	1000
P-06930	Dual Escutcheon Extension Ring	2000
P-06928	2.5" Self-Tapping Screw 2 Pack	4500
P-06921	1" Self-Tapping Screw 2 Pack	5000
P-06915	Debris Cover, Black	1
P-1078-18	18" Hyco strap	100
P-1078-26	26" Hyco strap	100
P-06735	Tee Adaptor, Female 3/8" Compression x 2 x Male 3/8" Compression	100
P-06406*	Poly Inline Hammer Arrestor 1/2" Crimp PEX	50
P-06407*	Poly Inline Hammer Arrestor 1/2" UPONOR PEX	50
P-06408*	Poly Inline Hammer Arrestor 1/2" Male CPVC	50

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained. 4/2021

2727 CHEMSEARCH BLVD., IRVING, TX 75062 | PHONE: (800) 854-3215 | FAX: (800) 243-1777 | LSPproducts.com

ROUGH-IN INSTALLATION INSTRUCTIONS

1. Identify the desired outlet location.
2. Attach the supply line to the valve inlet via pipe manufactures recommended practice. (i.e. sweat for copper, solvent cement for CPVC, crimp rings for PEX)
3. Fasten the Washing Machine Pull Stop BoxTM using two screws or two nails into a stud. (Do not over tighten screws or over drive nails). Supply line pipe clamps need to be installed a minimum of 6 inches above/below Pull Stop BoxTM inlet connection
4. The Washing Machine Pull Stop BoxTM is shipped in the “off” position. Once the box is securely attached to the wall and the supply line is properly attached, no further work is necessary during the rough-in phase. The included protective cover provides significantly better protection of the valve/valve threads during the drywalling/ construction processes.

TRIM KIT INSTALLATION INSTRUCTIONS

1. Pull off the protective cover.
2. Line up the threaded metal arm to fit through the square hole in the escutcheon and push the escutcheon into the outlet box until it is flush with the wall while making sure to feed the threaded metal arm through the square hole.
3. Screw escutcheon in using the two supplied screws.
4. Thread the knob onto the threaded metal arm until there is interference with the escutcheon, but a minimum of four complete turns.
5. Snap “U” shaped part of the red clip onto the knob to prevent the valve from being accidentally turned on.
6. When it's time to install the supply line, simply tighten it onto the valve outlet. There is no need to remove the escutcheon.
7. When water supply is desired, pull off the red clip, push the knob towards the wall to turn the valve on, and then snap the “C” shaped part of the red clip onto the end of the handle for storage.
8. To stop the flow of water, pull the knob out.

VALVE REPLACEMENT INSTRUCTIONS

1. Turn off water supply to building. Then, pull knob to “off” position.
2. Unscrew knob and screws. Then, pull out the escutcheon.
3. Remove the screw and valve block. Then, remove current valve and replace with a new one.
4. Secure the valve block back into place with the screw.
5. Follow steps 3-8 under **Trim Installation Instructions**.

Product Submittal	
Job Name:	Date:
Part Number:	Quantity:
Architect:	
Contractor:	

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained. 4/2021