

## PUSH ON ANGLE STOP WITH INTEGRATED SUPPLY LINES

### SPECIFICATIONS

Quarter-turn angle stop valves with push-fit connections and supply lines allow for quick finish installation to complete the job.

### PERFORMANCE SPECIFICATION


- Working Temperature 40°F-160°F with intermittent temps up to 180°F
- Working Pressure 20-125 PSI with intermittent impulse up to 180 PSI

### MATERIAL SPECIFICATIONS

- Tubing ..... Reinforced PVC with stainless steel braid
- Valve ..... Lead-free brass
- Connection Nuts .... Nickel plated brass or engineered polymer for ballcock nuts
- Washers ..... NSF/ANSI 61 Compliant

### CERTIFICATIONS / LISTINGS

- ASME A112.18.6/CSA B125.6
- ASME A112.18.1/CSA B125.1
- NSF / ANSI 372
- NSF / ANSI / CAN 61

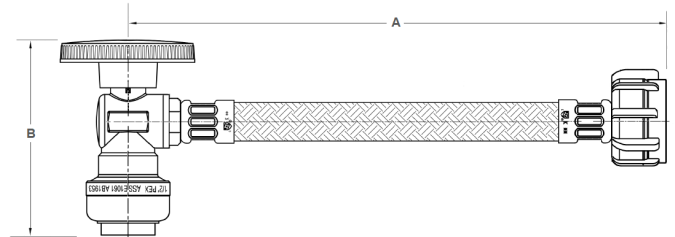

Part Number	Description	Dimensions (A)	Dimensions (B)
PVM-FC120	1/2" Push-fit x 1/2" F.I.P S.C., 20"	21.1"	2.61"
PVM-WC112	1/2" Push-fit x 7/8" Ballcock, 12"	13.5"	2.61"

Product Submittal	
Job Name:	Date:
Part Number:	Quantity:
Architect:	
Contractor:	

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained. 12/2024